

Safety product overview IDEC

Safety



Signal towers
Safety switches
Enabling switches and Release switches
Emergency stop switches
Relays with forcibly guided contacts
Safety laser scanners

Safety Laser Scanner SE2L-H05LP

Technical Specifications:

- PL d, Safety Category 3, SIL 2
- Protective zone (safety): 5 m
- Warning zone (non-safety): 20 m
- 270° detection angle
- Master/slave function
- Scan skip function reduces false detections
- EDM functions
- MicroSD card slot

**EUR
2 258,40**



Enabling Switch HE1G-L21SM



Technical Specifications:

- Comfortable operation with low actuating force
- 3 positions OFF-ON-OFF
- 2 switching contacts, 1 auxiliary NC contact
- Screw terminals
- Silicone rubber actuator
- Safety Category 4
- Protection rating IP66

**EUR
245,20**

Safety Interlock Switch HS5L-VA44M-G

Technical Specifications:

- Compact, robust design with metal head
- Dimensions 35 × 40 × 127 mm
- Spring-lock or solenoid-lock type
- 2 or 4 contact versions
- Terminal connections
- 1400 N locking force
- LED indicator
- Protection rating IP67

**EUR
140,80**




Relays with forcibly guided contacts RF1V and RF2V

Technical Specifications:

- Compact and slim design
- Socket and PCB mounting
- RF1V: 4 and 6 poles, 6 A contacts
- RF2V: 2 poles, 6 A contacts
- Forcibly guided contact mechanism (EN 50205)
- Fast response time
- High shock resistance
- Protection category RT III

EUR
20,40

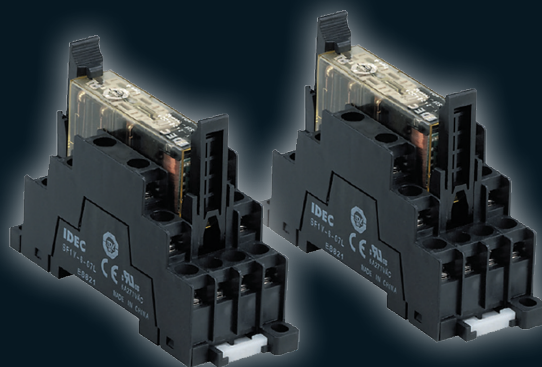

Safety Interlock Switch HS5D

Technical Specifications:

- Compact design 30 × 30 × 91 mm
- Detects head removal for increased safety
- Compact dimensions with up to three contacts
- Available with metal head

EUR
23,60



Emergency Stop Switches

Technical Specifications:

- Cost-effective YW emergency stop switches with a 22 mm mounting diameter
- Mounting depth 46mm
- Twist or pull to release
- Safety Category 4
- Contacts: 1 to 3 NC/NO contacts Operating temperature -20...+55 °C
- Protection rating IP65



EUR
7,68

LD6A LED Signal Towers with Modern Design and High Functionality

Technical Specifications:

- Modern LED signal towers, now with audible alarm
- Adjustable alarm volume 70...90 dB ("Z" version)
- Oval shape – dimensions 40 × 60 mm
- Modular system, up to 5 color modules
- Any combination of LED colors: Red (R), Yellow (Y), Blue (S), Green (G), White (W)
- 24 VAC/DC power supply
- 5 mounting options
- Protection rating IP65

EUR
73,60



LED Safety signal light



LD6A Series

FLASHING | STEADY LIGHT | 2
ALARMS



The LD6A Series Stands Out
with Its Exclusive Design at an
Excellent Price

- Modular system, up to 5 color modules
- Easy installation and assembly
- High brightness and visibility from all directions
- 5 mounting options
- Any combination of LED colors: green, red, yellow, blue, white
- Protection rating IP65

**Audible
and Visual
Signaling**

